

DRA-KA06



DRA-Ka06 _ (Cassegrain).

K-band Ka-band: 18-40 GHz

()

(H): 1.5° (V): 1.5°

: 25 dB


: 40 dBi

- High gain: 40 dBi
- Full K-band & Ka-band covering (both by order)
- Beam(H): 1.5°; Beam (V): 1.5°
- Cross-polarization isolation of 25 dB
- Transmission or receiving of K-band & Ka-band signals
- Applied as a part of broadcasting head-end station, repeater, interactive microwave system and used at subscriber's receiving side

:	
GHz	25-40 (18-40)
dBi	40

VSWR	1.5
dB	25
:	
@	1.5°
@	1.5°
	-12 dB
RF :	
W	20
	WR-28 C-320
:	
°C	-50 +80
	100% 25°C
:	
mm	650x650x220
kg	5.8
	50-100 mm

Image not found or type unknown

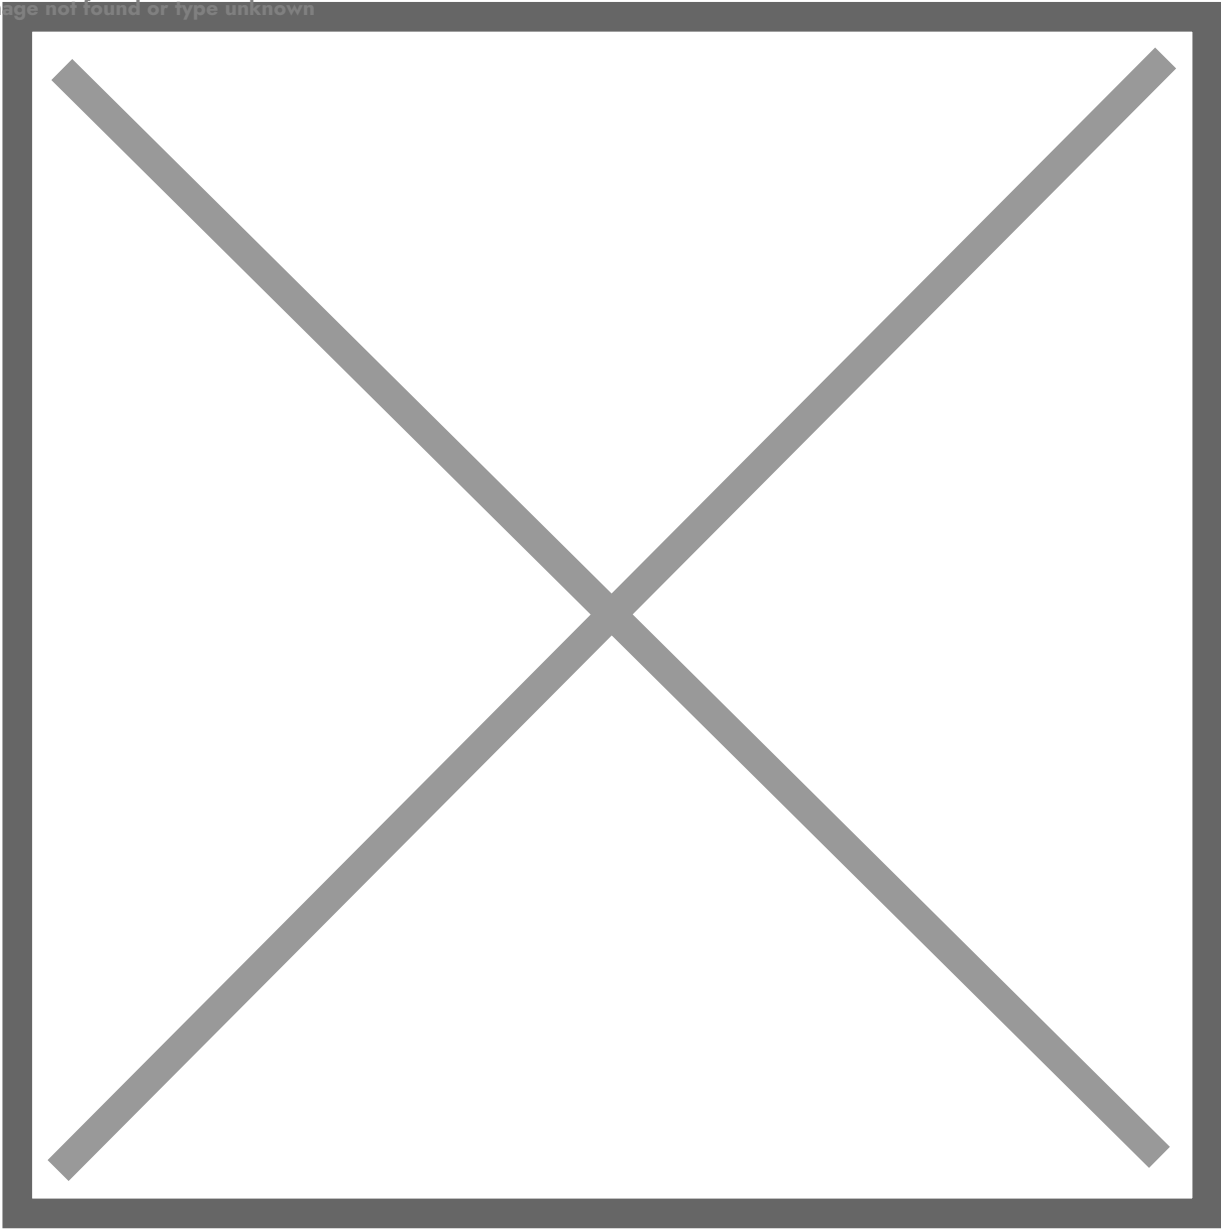

(UMT LLC)

!

/