

## DRA-KA09



DRA-Ka09 is Double Reflector Antenna (Cassegrain antenna).

It is designed for K-band & Ka-band covering 18-40 GHz

Can operate with linear and circular polarizations (by order)

Beam (H): 1°; Beam (V): 1°

Cross-polarization isolation: 25 dB

Gain: 41 dBi


- High gain: 41 dBi
- Full K-band & Ka-band covering (both by order)
- Beam(H): 1°; Beam (V): 1°
- Cross-polarization isolation of 25 dB
- Transmission or receiving of K-band & Ka-band signals
- Applied as a part of broadcasting head-end station, repeater, interactive microwave system and used at subscriber's receiving side

Specification	
<b>Frequency range, GHz</b>	25-40 (18-40 by order)
<b>Gain, dBi</b>	41

<b>VSWR</b>	1.5
<b>Polarization</b>	Linear or circular
<b>Cross-polarization isolation, dB</b>	25
<b>HPBW:</b>	
<b>@horizontal</b>	1°
<b>@vertical</b>	1°
<b>Side-lobe level relative to the main beam</b> , dB	-12
<b>Input power, W</b>	20
<b>Waveguide</b>	WR-28 or C-320
<b>Temperature range, °C</b>	-50 to +80
<b>Humidity</b>	100% where 25°C
<b>Size, mm</b>	980x980x310
<b>Weight, kg</b>	12.5
<b>Mount</b>	Mounting on a vertical pipe with a diameter of 50-100 mm
<b>Casing material</b>	Canvas coverage

### Installation:

Image not found or type unknown

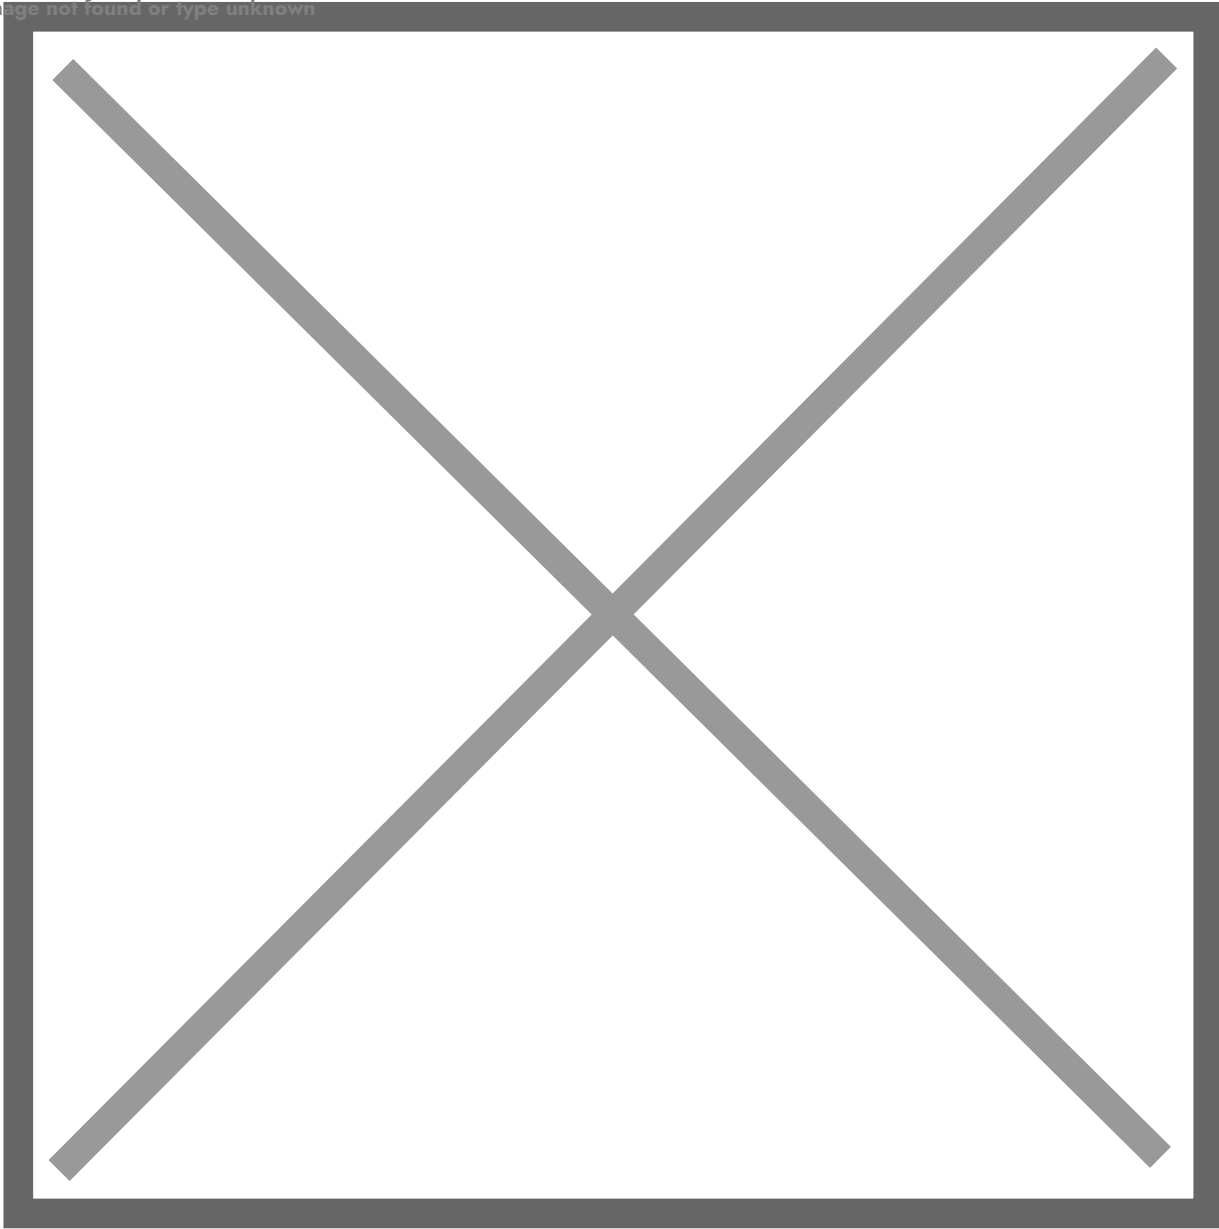

*Taking into consideration that we (UMT LLC) are developer and system integrator, also do not stop on our technical growth and improvement, know that view of all our devices and equipment including their technical parameters may be different from pictures presented on website and parameters listed on each device webpage.*

**Note!** *All details customer has to confirm in advance during ordering and before payment. Those parameters that were not specified and / or were not agreed while ordering will be implemented as basic at the discretion of the manufacturer. Each our customer has 1.5 year warranty and 7 year aftersales support for whole range of our products.*